

Products Series



XIAMEN XGMA Machinery Co., Ltd.
Authorized Dealer:
PT. SICOMA INDO PERKASA
Ruko THE ICON H/5 Jl. Raya Cisauk - Lapan BSD Tangerang 15343
Tlp: 021-22232607 EMAIL: info@sicoma.co.id

Pictures are for reference only. All specifications and information are subject to change without prior notice.

Jan.2019 1st Edition

Excellent Performance


- ◆ The turbocharged, air-air intercooled engine technology and patented dual-pump increase power output by 30%, reduces fuel consumption by 10%, and improves reliability by 30%.
- ◆ Based on standard machine configuration, XGMA offers the highest dumping height among the 3-ton loaders with the same wheel base in the industry.
- ◆ The proprietary optimization technology offers a small turning radius, strong maneuverability, and high flexibility.
- ◆ ROPS/FOPS cab protects the operator from getting injured during an accident.



Specifications

Description		Unit	XG935H	
Engine	Brand		Yuchai	Cummins
	Model		YC6J125Z-T20	6BTAA5.9-C130
	Type		Four-stroke cycle, water-cooling, in line, turbocharged, direct-injection.	Four-stroke cycle, water-cooling, in line, turbocharged, air-air intercooled engine
	Cylinders-bore × Stroke		6-105×125	6-102×120
	Rated power	kW	92	97
	Rated speed	rpm	2200	2200
	Max. torque	N.m	500	580
	Fuel consumption per hour	g/kW.h	≤225	≤237
Performance	Rated load	kg	3200	
	Bucket capacity(Standard)	m ³	1.8	
	Bucket capacity(Optional)	m ³	1.4-3.0	
	Operating weight	t	10.8	
	Max. gradeability	°	28	
	Max. Turning Angle	°	35	
	Max. Dumping Height	mm	≥3060(to cutting edge)	
	Dumping reach	mm	≥1020	
	Max. Recovery Angle	°	≥50	
	Max. breakout force	KN	100	
	Lifting time of lift arm	s	≤6	
	Total cycle time	s	≤10.4	
	Min. turning radius (in carry position)	mm	5860	
Overall dimensions(L × W × H)	mm	6970 × 2245 × 3330		
Torque Converter	Brand		XGMA	
Gear Box	Brand		XGMA	
Axle	Brand		XGMA	
Travel Speed	Forward	I	km/h	0-12
		I	km/h	0-40
	Reverse		km/h	0-16

Physical Dimensions Drawings

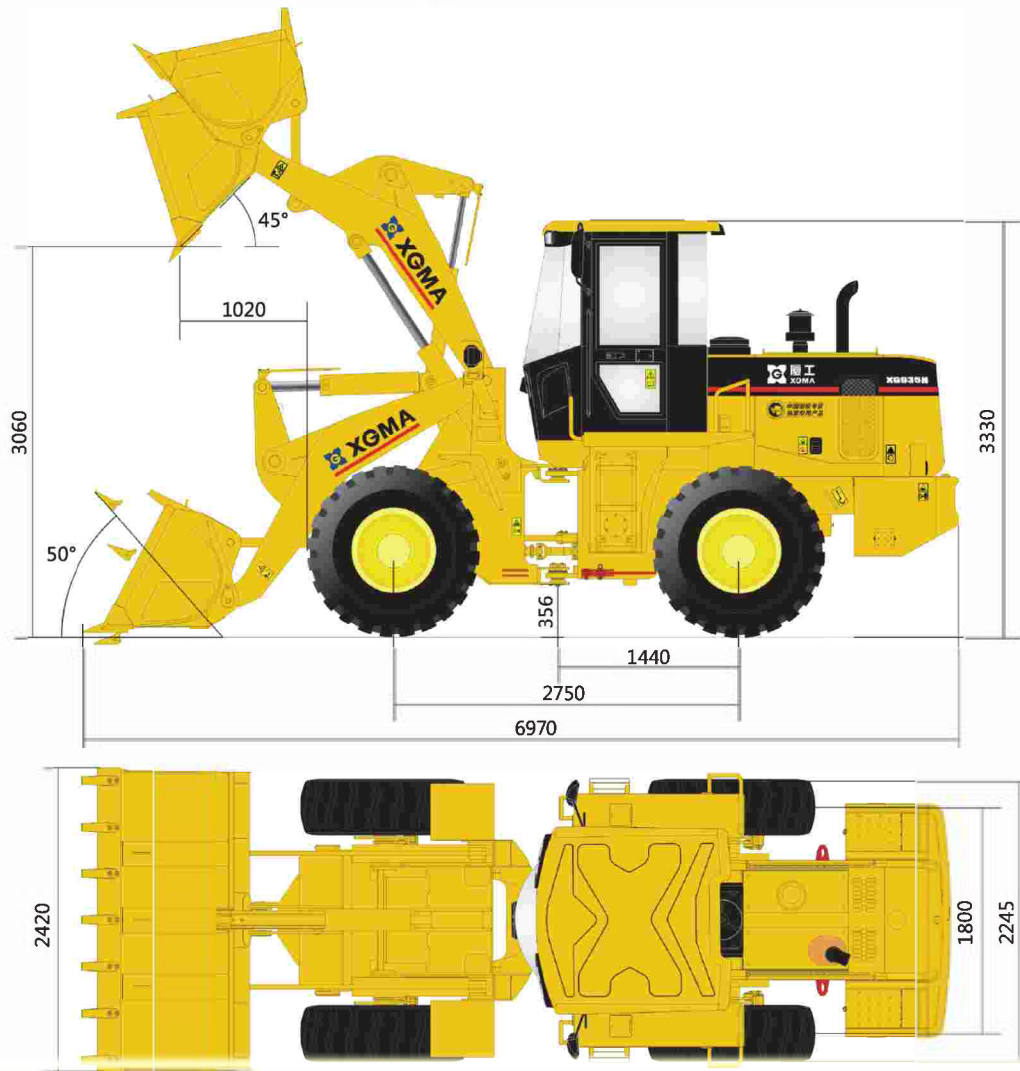

Notes: